

# INDUSTRIAL MEDIA CONVERTER PRODUCTS

Industrial Media Converter 10/100 Tx,155M SC , Unmanage ,Single Fiber A,B



## FEATURE

### 100M fast Ethernet access

- All series supports "10/100M RJ45 port and dual uplink SC port" combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- Support non-blocking wire-speed forwarding.
- Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

### Port lightning protection, wide voltage input

- Contact discharge 8KV, air discharge 15KV; port lightning protection common-mode 4KV, differential mode 2KV;
- Industrial dual power input.
- DC INPUT: 48V-57V, non-PoE DC INPUT: 12-48V.

### Stable and reliable

- CE, FCC, RoHS.
- Low power consumption, No fan, aluminum shell.
- The user-friendly panel, it can show the device status through the LED indicator of PWR, Link.




## PRODUCT DESCRIPTION

The IMC-FWXX-SC-20 is a 10/100M industrial Ethernet fiber switch independently developed by Focomm. It is designed to meet industrial fields and systems and can operate stably for a long time in harsh environments. It has 1\*10/100M RJ45 port and 1\*155M uplink SC port. Each port can support full line-rate forwarding.

IMC-FWXX-SC-20 industrial Ethernet switch has excellent industrial field environment adaptability (including mechanical stability, climate adaptability, electromagnetic environment adaptability, etc.), protection level up to IP40, It can support dual redundant power supply, low power consumption and no fan cooling technology, MTBF average trouble-free working time up to 35 years, 5-year warranty. It is suitable for industrial scenes such as intelligent transportation, rail transit, electric power, mining, metallurgy and green energy construction to form a cost-effective and stable communication network. Unmanaged models, plug and play, no configuration, easy to use.

## APPLICATION

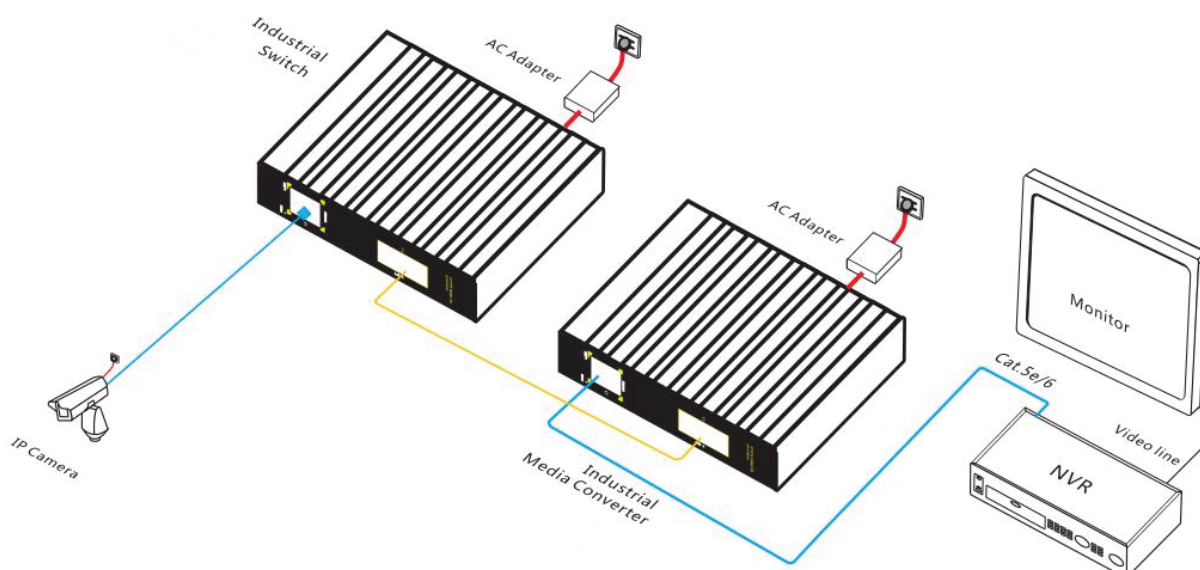

## TECHNICAL SPECIFICATION

<b>Interface Characteristics</b>	
<b>Fixed Port</b>	1*10/100Base-TX RJ45 port (Data) 1*155M uplink SC port (Data) 2 set of V+, V- redundant DC power ports (5 Pin Phoenix terminal)
<b>Ethernet Port</b>	10/100Base-TX auto-sensing, full/half duplex MDI/MDI-X self-adaption
<b>Twisted Pair Transmission</b>	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-T: Cat5e or later UTP(≤100 meter)
<b>Optical Port</b>	Default optical module is single-mode dual-fiber 20km, SC port
<b>Optical Cable/ Distance</b>	Multi mode: 850nm / 0 ~ 550M, 1310nm / 0~2km single mode: 1310nm / 0 ~ 40KM, 1550nm / 0 ~ 120KM
<b>Chip Parameter</b>	
<b>Network Protocol</b>	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3u 100Base-FX, IEEE802.3x
<b>Forwarding Mode</b>	Store and Forward(Full Wire Speed)
<b>Switching Capacity</b>	1.6Gbps
<b>Forwarding Rate@64byte</b>	0.30Mpps
<b>MAC</b>	1K
<b>Buffer Memory</b>	768K
<b>Jumbo Frame</b>	1536bytes
<b>LED Indicator</b>	Power: PWR (green), network: Link (yellow), fiber port: L/A (green)
<b>Power</b>	
<b>Working Voltage</b>	12-48VDC, 5 Pin industrial phoenix terminal, support anti-reverse protection
<b>Power Consumption</b>	Standby<3W, Full load<5W
<b>Power Supply</b>	No, optional 24V/24W industrial power supply
<b>Physical Parameter</b>	
<b>Operation TEMP / Humidity</b>	-40~+75°C;5%~90% RH Non condensing
<b>Storage TEMP / Humidity</b>	-40~+85°C;5%~95% RH Non condensing
<b>Dimension (L*W*H)</b>	119*100*30mm
<b>Net /Gross Weight</b>	<0.5 kg / <0.7 kg
<b>Installation</b>	Desktop, DIN rail

Certification & Warranty	
Lightning protection / protection level	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class A IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration), IEC60068-2-27 (anti shock) IEC60068-2-32 (free fall)
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS
Warranty	5 years, lifelong maintenance.

## ORDER INFOMATION

PRODUCT	PART NUMBER
Industrial Media Converter 10/100 Tx,155M SC , Unmanage ,Single Fiber , the SC port 1310nm/20km single-mode single-fiber module, A	IMC-FW13-SC-20
Industrial Media Converter 10/100 Tx,155M SC , Unmanage ,Single Fiber , the SC port 1550nm/20km single-mode single-fiber module, B	IMC-FW15-SC-20