



VGA Extender

User Manual

Model : VE05

1 x 5 VGA Distribution Amplifier CAT5e Extender - Trnamsitter
Unit




Introduction

VE05 is a VGA extender designed to use a cost-effective cable to carry the signal for a long-distance, with the resolution up to 1600 x 1200@85Hz. The TX unit has a built-in VGA loop-out for an extra video display.

Features


- Extends and split a VGA into 5 ones.
- Resolution up to 1600 x 1200@85Hz.
- Signal extension up to 300M over a CAT5e cable.
- Built-in VGA loop-out at TX unit for local display.
- Built-in contrast, brightness adjustment buttons at RX unit.

Installation View

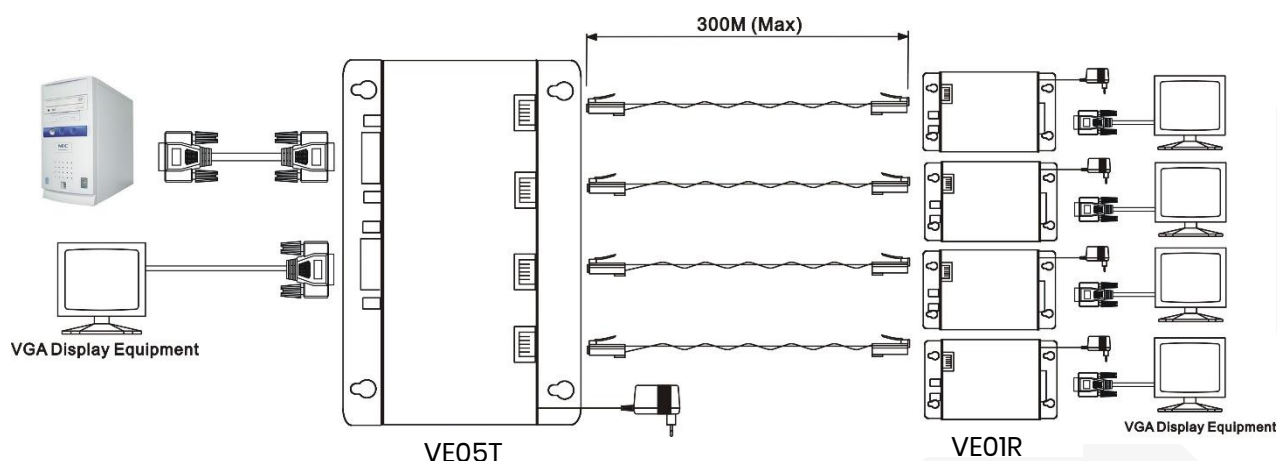


Panel View

VE05T

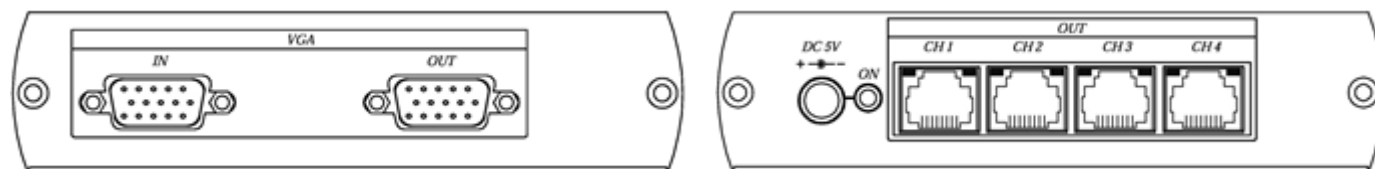

VE01R

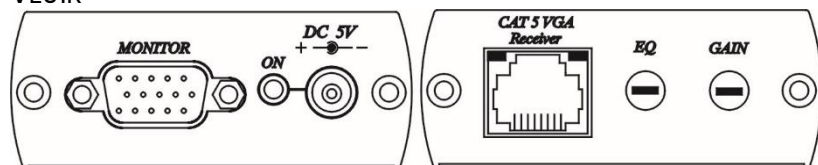


LED Indication

Blue:	Power on/off
RJ45 (Link Cable Connector):	Green - Signal on/off


Installation Tips

Skew Picture

Due to the inside of CAT5 cable that the pairs of wires are twisted at different rates, and the different quality on cable itself and installation that will cause different signal arrival time at each pair. If there are big different at arrival time, that will cause RGB skew status. This is seen on the monitor as separation, or lack of convergence in colors. Normally it happens on long CAT 5 cable runs.

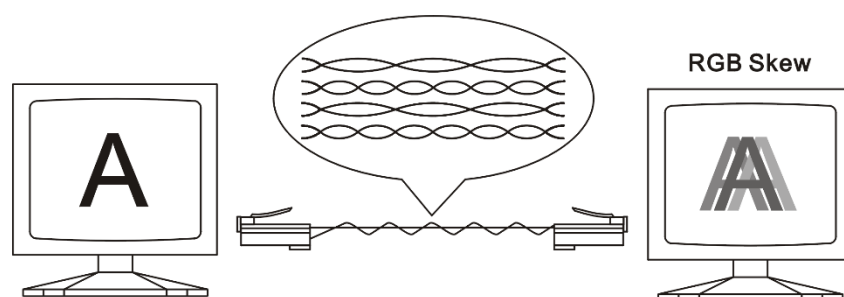


Recommend to use following cabling way to reduce skew status, to add special made “skew immunized adaptor”, 2 pieces included at the package.

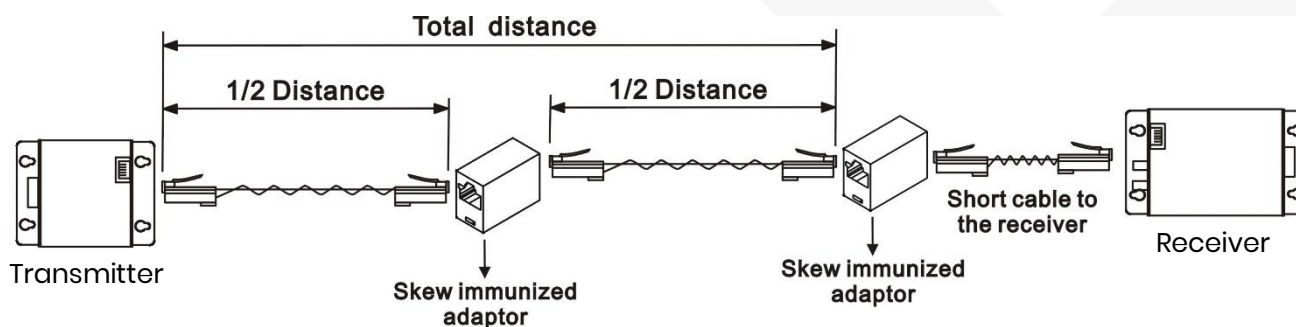

CAUTION

To avoid display equipment damaged, be sure to make correct cable connection and power for both VE02T, VE05T, VE01R before connecting VE02T, VE05T, VE01R.

Recommend to change VE01R CAT5 receiver to VE02DALS, which built in RGB skew adjustment for the optimum video performance under long cable run. It also could be daisy chained for another VE02DALS to extended working range over 300 meters and multiple displays.

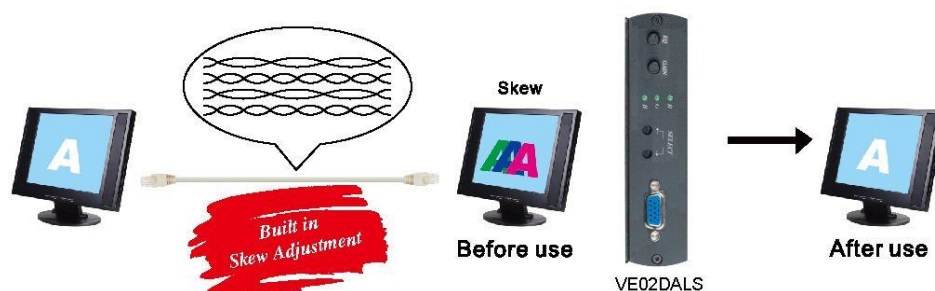

Specification

ITEM NO.	VE05T	VE01R
Support		
Max. Video Resolution	1600 x 1200@85 Hz	
Video Bandwidth	150MHz	
Transmission Distance	300M (1000ft)	
Video Input Signals	RGB Analog (75Ω, 0.7Vp-p), Sync Signal H/V Separated (TTL)	
Frequency	Horizontal 30-95KHz, Vertical 50-180Hz	
Ports & Interfaces		
Video Input	2 x DB15	1 x RJ45
Video Output	4 x RJ45	1 x DB15
Video Loop-out	1 x DB15	
Power		
Power Supply	DC 5V 1A	DC 5V 1A
Power Consumption	500mA (Max)	400mA (Max)
Ambient Temperature		
Operation	0 to 55°C	
Storage	-20 to 85°C	
Humidity	Up to 95%	
Physical Characteristics		
Dimensions	125 x 95 x 30mm	67 x 110 x 27mm
Weight	265g	175g